

JW PRO SERIES

N-Type Bifacial

Dual-Glass Mono Module

595-625W



Higher Customer Value

- Lower 1st-year and annual degradation
- Lower system BOS cost, higher power generation, lower LCOE, and higher ROI
- Dual-side power generation, with up to 30% increase in backside power generation in different installation environments, further reducing overall BOS and LCOE



Higher Power Generation Gain

- Excellent IAM property and better weak illumination response
- Lower 1st-year degradation (1%) and annual degradation (0.4%)
- Lower temperature coefficient (-0.30 %) and lower operating temperature, resulting in more power generation




High Reliability

- Apply latest generation TOPCon technology with lower LID and LETID
- Apply innovative non-destructive cutting technology to reduce the risk of micro cracks
- Withstand harsh environmental conditions




High Safety

- Latest TOPCon technology with no polysilicon wrap around, zero leakage current and better resistance to hot-spot
- Pass mechanical load test of 5400Pa on the front side and 2400Pa on the back side

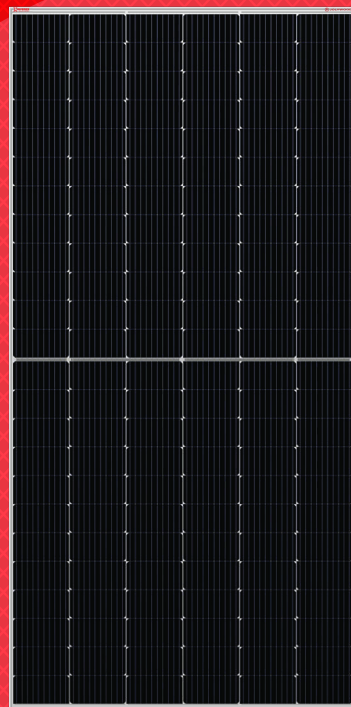

IEC 61215(2021)/IEC 61730(2023)/IEC 61701/IEC 62716
 ISO 9001:2015: Quality Management System
 ISO 14001:2015: Environment Management System
 ISO 45001:2018: Occupational health and safety
 IEC 62941:2019: Quality system for PV module manufacturing

Linear Performance Warranty

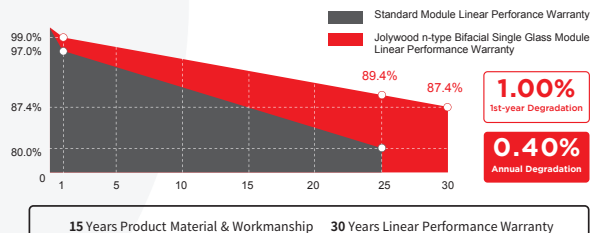

Version 2024.12 ©Jolywood (Taizhou) Solar Technology Co., Ltd. All rights reserved.

Maximum Power Output

625W

Maximum Module Efficiency

23.14%

Power Output Tolerance

0~+3%



UAN: +92-21-111-209-988



www.aptinverex.com



info@aptinverex.com

JW Pro Series | N-type Bifacial Dual-Glass Mono Module

595-625W

Electrical Properties | STC*

Module Type	R2-595	-R2-600	-R2-605	-R2-610	-R2-615	-R2-620	-R2-625
Peak Power (Pmax) (W)	595	600	605	610	615	620	625
MPP Voltage (Vmp) (V)	40.37	40.55	40.73	40.91	41.09	41.27	41.45
MPP Current (Imp) (A)	14.74	14.80	14.85	14.91	14.97	15.02	15.08
Open Circuit Voltage (Voc) (V)	47.06	47.26	47.46	47.66	47.86	48.06	48.26
Short Circuit Current (Isc) (A)	15.62	15.67	15.72	15.77	15.82	15.87	15.92
Module Efficiency (%)	22.03	22.21	22.40	22.58	22.77	22.95	23.14

*STC: Irradiance 1000 W/m², Cell Temperature 25°C, AM1.5

The data above is for reference only and the actual data is in accordance with the practical testing

Power Measurement Tolerance ±3%, Voc Tolerance: ±4%, Isc Tolerance: ±5% Testing Condition: Front Side

BNPI & Bifaciality coefficient

Module Type	R2-595	-R2-600	-R2-605	-R2-610	-R2-615	-R2-620	-R2-625
Pmax (W)	654.50	660.00	665.50	671.00	676.50	682.00	687.50
Voc (V)	47.20	47.40	47.60	47.80	48.00	48.20	48.40
Isc (A)	17.19	17.24	17.30	17.35	17.41	17.46	17.52
ΦPmax (±10%)	80	80	80	80	80	80	80
ΦVoc (±3%)	99	99	99	99	99	99	99
ΦIsc (±10%)	79	79	79	79	79	79	79

Electrical Properties Under Different Rear Gain

Power Gain (%)	Peak Power (Pmax) (W)	MPP Voltage (Vmp) (V)	MPP Current (Imp) (A)	Open Circuit Voltage (Voc) (V)	Short Circuit Current (Isc) (A)
10	671.0	40.91	16.40	47.66	17.35
15	701.5	40.91	17.15	47.66	18.14
20	732.0	41.01	17.85	47.76	18.89
25	762.5	41.01	18.59	47.76	19.67
30	793.0	41.01	19.34	47.76	20.46

Operating Properties

Operating Temperature -40°C~+85°C

Maximum System Voltage 1500V (IEC)

Maximum Series Fuse Rating 35A

Bifaciality* 80%

Front Static Load Snow load 5400Pa, Wind load 2400Pa

*Bifaciality=Pmaxrear (STC) /Pmaxfront (STC) , Bifaciality tolerance: ±5%

Temperature Coefficient

Temperature Coefficient of Pmax* -0.300%/°C

Temperature Coefficient of Voc -0.250%/°C

Temperature Coefficient of Isc +0.045%/°C

Nominal Operating Cell Temperature (NOCT) 42±2°C

*Temperature Coefficient of Pmax±0.03%/°C


Specification

Number of Cells	132pcs
Module Dimension	2382mm*1134mm*30mm
Weight	33.3kg
Front / Rear Glass*	2.0mm*2.0mm Heated strengthened glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 (3 diodes)
Length of Cable	4.0mm ² , +300mm/-180mm (Cable length can be customized)
Packaging Configuration	36pcs/Pallet, 720/40HQ Container
Country of Origin	China
Fire Rating	C

Connector Model QC Solar QC4.10-cds / Staubli EVO2

*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Jolywood (Taizhou) Solar Technology Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

Engineering Drawing (unit: mm)

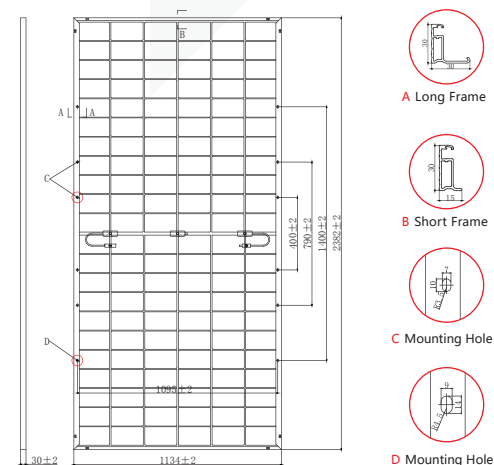

Characteristic Curves

